

SOLUTIONS
 automotive security
 www.hf-solutions.co.uk



In the event of a transmitter failing, the custom pin override can be entered in order to turn the alarm and immobiliser to off.


HPA OVERRIDE PROCEDURE

USE OF THE OVERRIDE CODE

Alarm cycles will be triggered as the code is being keyed in.
 Code by turning the vehicle 's ignition key ON and OFF.

Example shows OVERRIDE CODE 13212

Toggle the ignition ON/OFF after the same number of flashes by the LED as the individual digit of the OVERRIDE Code.

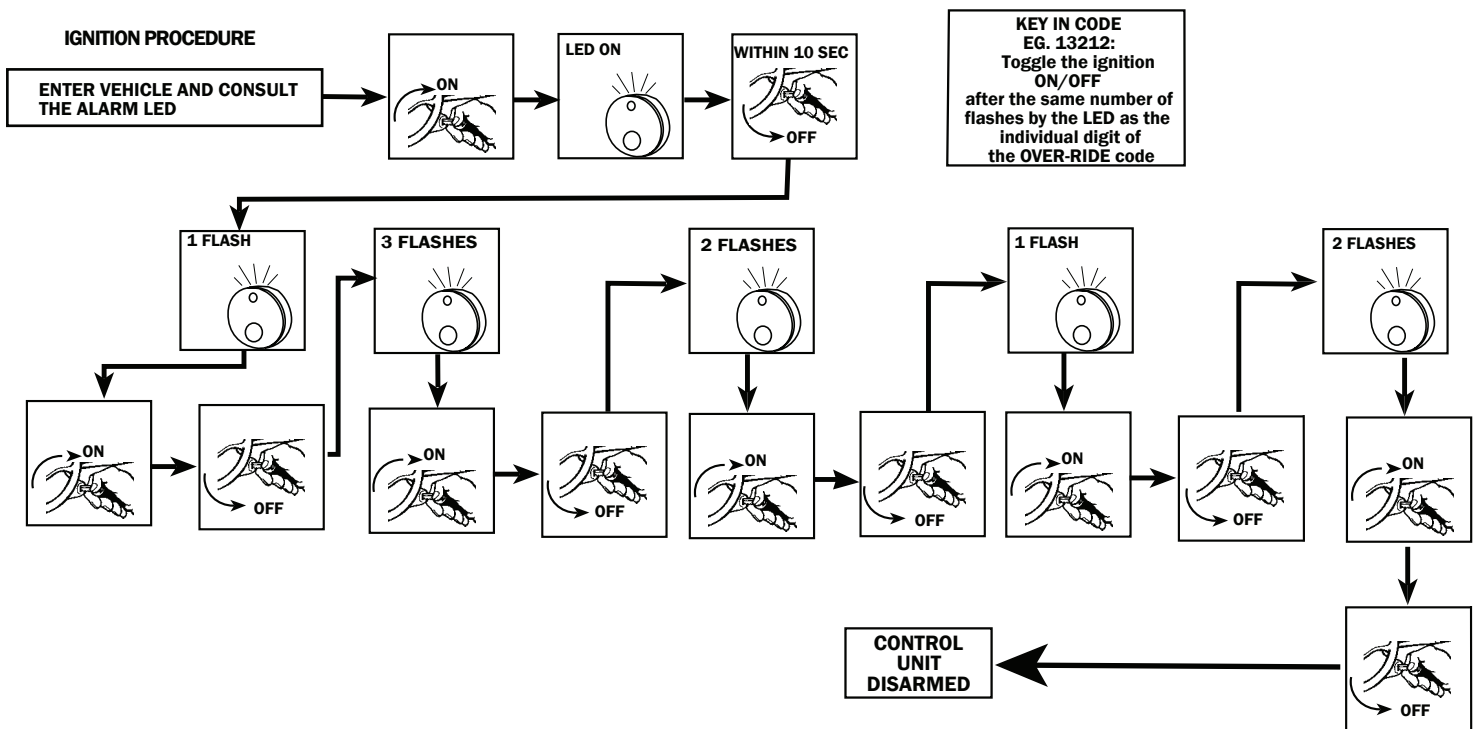

WARNING: if the wrong code is keyed in 3 times, the control unit will be blocked for 10 minutes to prevent attempts to acquire the code.

9 Bucks Avenue, Watford, Herts, WD19 4AR. Mobile: 07721654829

email: info@hf-solutions.co.uk

Helping Keep TVR On The Road